









- Meets and exceeds ECE R65, SAE J845, Class 1
- Two levels of unique LED reflectors provide a focused signal for superior brightness
- Waterproof, shock resistant, potted circuit board
- 23 Built-in user selectable flash patterns,including 5 simulated rotating patterns
- Provide 360° of Coverage
- Low amp draw and bright output provide the ideal beacon for everyday use



Specifications

| Model | Input Voltage | 3W LEDs | | Color Availbale for Lens | Mounting | Size | Accessory |
|-------|---------------|----------|---|---|-----------------|--|---|
| | | In total | Color Availbale | | | | |
| C24 | DC 12-30V | 24 PCs |  |  | Permanent mount | 4.2 " High Base Diameter:5.2 " Lens Diameter:4.3 " | 3 screws |
| | | |  |  | Pipe mount | | Pipe(don't include) |
| | | |  |  | Magnetic mount | 4.6 " High Base Diameter:6.7 " Lens Diameter:4.3 " | A、 12" lines , B、 A13-163 Cigar plug |

Dimensions

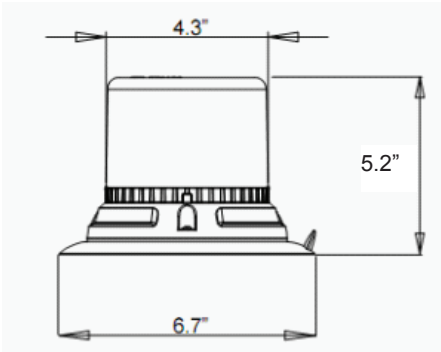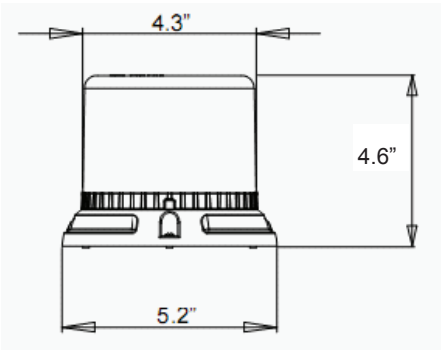

Flash Patterns

- | | | |
|-----------------------|----------------------|---------------------|
| 0 Random (drfaut) | 8 Single H/L (split) | 16 Single H/L (all) |
| 1 Single (split) | 9 Single (all) | 17 Steady 4 (all) |
| 2 Double (split) | 10 Double (all) | 18 Double(aLL) |
| 3 Quad (split) | 11 Quad (all) | 19 Double(aLL) |
| 4 Quint (split) | 12 Quint (all) | 20 Single(all) |
| 5 Mega (split) | 13 Mega (all) | 21 Single(all) |
| 6 Ultra (split) | 14 Ultra (all) | 22 Rotator(all) |
| 7 Slinge-Quad (split) | 15 Single-Quad (all) | |

